




## FEATURES

- UNIVERSAL INPUT 85-264 VAC, 47-400 Hz OR 110-340 VDC
- HIGH SURGE / TRANSIENTS AND EMI INPUT PROTECTION
- HIGH ISOLATION
- HIGH QUALITY OUTPUT 24 VDC +/- 1%, 0.23 A
- LESS THAN 30 mV<sub>pp</sub> RIPPLE
- SHORT CIRCUIT OUTPUT PROTECTION
- OVER CURRENT OUTPUT PROTECTION
- 77% EFFICIENCY, SAVES POWER
- SMALL SIZE
- WEIGHT 59 g (2.1 oz)
- SCREW TERMINALS FOR WIRES 22-12 AWG (2.5 mm<sup>2</sup> max)

## APPLICATIONS

- TO POWER [GMAG100](#), [GFC110](#), [GFC111](#) OR OTHER FLOW COMPUTERS / TOTALIZERS
- MOUNTABLE IN THE ENCLOSURE OF GFCXXX SERIES FLOW COMPUTERS
- TO POWER OTHER DEVICES IN THE SAME ENCLOSURE
- TO BE USED AS A STAND ALONE POWER SUPPLY FOR OTHER EXTERNAL DEVICES

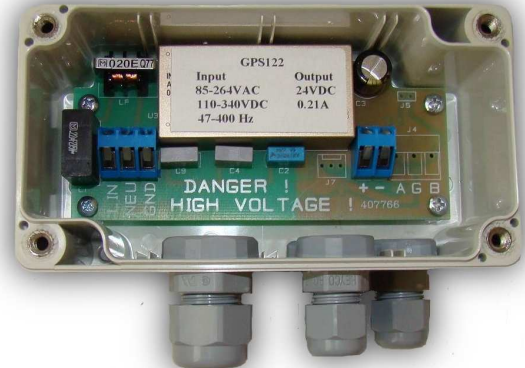

## 1. DESCRIPTION

The GPS122 is a regulated power supply with an universal input, very high regulation and isolation, high efficiency and very low ripple. It has surge and fast transients' protection and very high EMI and noise immunity at the input, and overload and short circuit protection at the output. It can be mounted in the enclosure of GFCxxx series flow computers thus saving space and reducing the cost. It can also be used as a stand-alone high quality power supply for many different devices. It can power both [GMAG100](#) magmeter and a GFCxxx flow computer and provide a complete solution.

With its very low noise and ripple it is an excellent choice for powering high quality instrumentation and industrial control devices.

## 2. ABSOLUTE MAXIMUM RATINGS \*

Operating temperature	-20 °C to +70 °C, at 50% load
Operating temperature	-20 °C to +60 °C, at 100% load
Maximum Input Voltage	264 VAC, 340 VDC
Minimum Input Frequency	47 Hz
Maximum output current	0.23A DC, 25 °C

**NOTICE: Stresses above those ratings may cause permanent damage to the device.**

## 3. CHARACTERISTICS

Parameter	Conditions	Min	Typ	Max	Units
Input Voltage, AC		85		264	V AC
Input Voltage, DC		110		340	V DC
Input Frequency		47		400	Hz
Output Voltage	Input 115VAC, 60 Hz, 25 °C, output current 230 mA	23.76	24.00	24.24	V DC
Output Ripple	Input 115VAC, 60 Hz, 25 °C, output current 230 mA			30	mV <sub>pp</sub>
Efficiency	Input 115VAC, 60 Hz, 25 °C, output current 230 mA		77		%

## 4. APPLICATION

### 4.1 MECHANICAL

Fig. 1 shows the dimensions of GPS122. The board is designed to be mounted into the enclosure of GFCxxx series flow computers / totalizers.

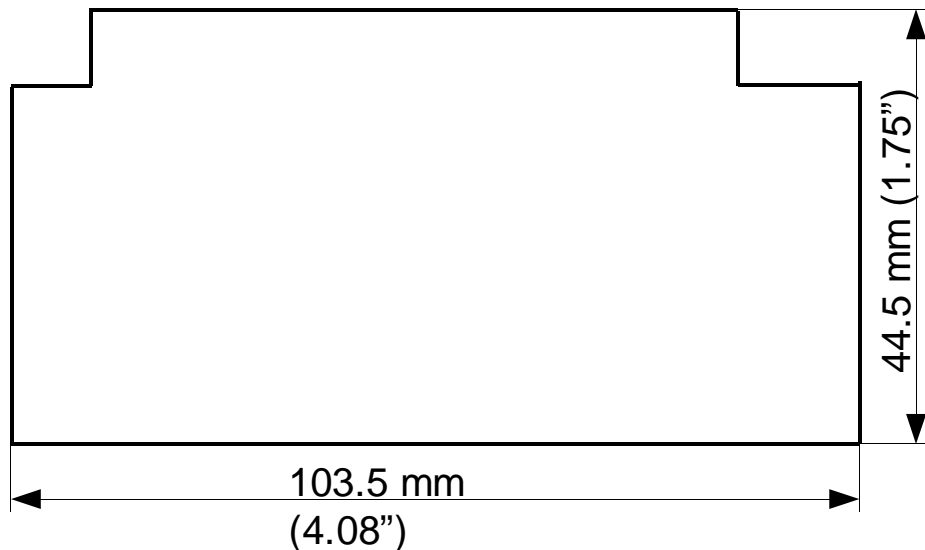


Fig. 1 Dimensions of GPS122

## 4.2 ELECTRICAL

The input voltage 85-264 V AC has to be applied to the terminal J1.

**NOTE: For safety earth ground must be connected to the “GND” terminal !  
Disconnect the high voltage before doing any work on GPS122 !**

The earth ground must be connected to the “GND” terminal in order to achieve the best performance of GPS122.

The output voltage is on terminal J2.

Fig. 2 shows the proper connections of the input and output voltage.

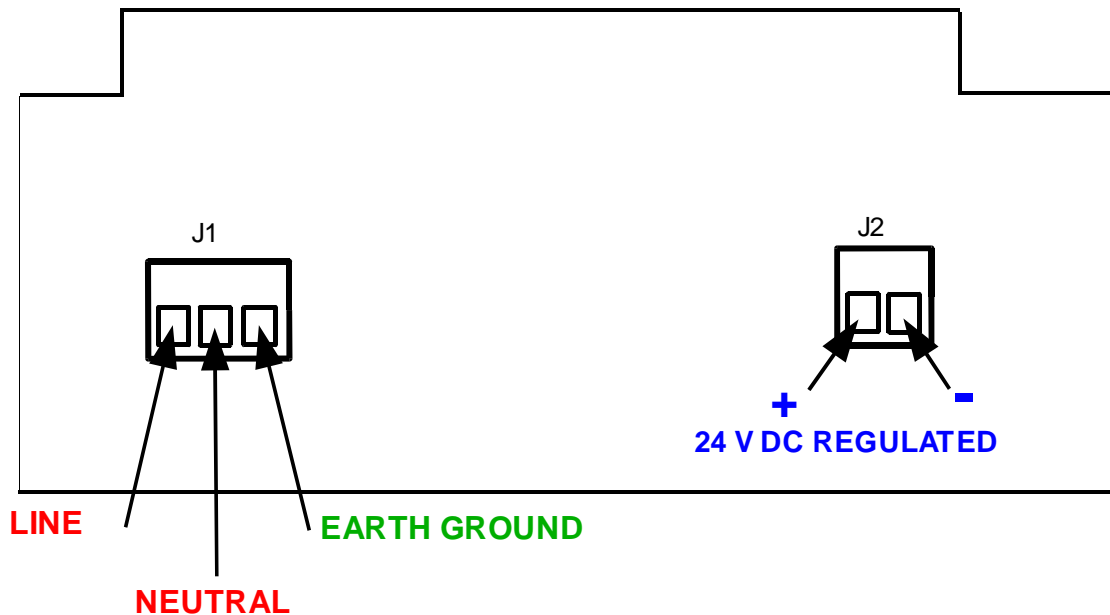


Fig. 2 Electrical connections to GPS122



## 5. ORDERING

For ordering please use the following G Instruments part numbers:

<i>Description</i>	<i>G Instruments PN</i>
GPS122 power supply board	30225
GPS122 mounted in a blind weather proof enclosure with 2 cable glands	30241



## IMPORTANT NOTICE

G Instruments reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products at any time without notice.

Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

G Instruments does not assume any liability arising from the use of any device or circuit described herein, nor does it convey any license under its patent rights or the rights of others.

Customers are responsible for their products and applications using G Instruments devices. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

G Instruments products are not authorized for use as critical components in life support devices or systems without express written approval of G Instruments.

Trademarks and registered trademarks are the property of their respective owners.